


6000 Series Tuf-Lite Fans



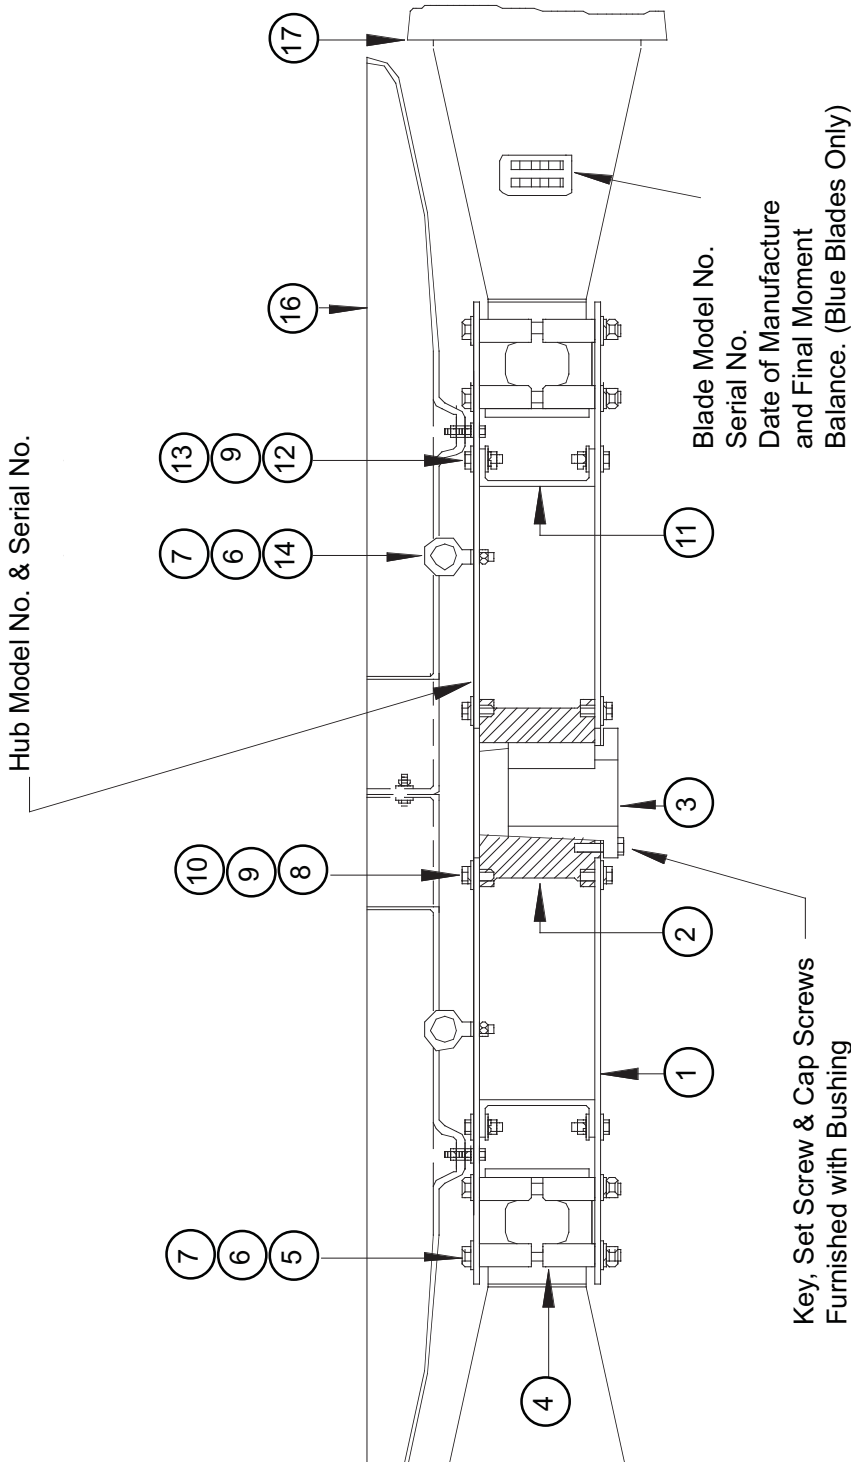


6000 Series Tuf-Lite Fans

HUB MODEL	FAN WEIGHTS (LBS)					
	U-1	24'	26'	30'	32'	10M
6	6806					2377 2637
7	6807					2505 2765
8	6808					2633 2893
9	6809					2761 3021
10	6810					2889 3149
11	6811					3017 3277
12	6812					3145 3405
13	6813					3273 3533
14	6814					3401 3661
15	6815					3528 3788
16	6816	3048	3224	3394	3544	3656 3916
18	6818	3228	3426	3606	3786	3912 4172

STANDARD DIMENSIONS - MODEL H BLADES									
FAN DIAMETER (FEET)	24	26	28	30	32	10M			
SEAL DISC MODEL	81132	81132	81132	81132	81132	81132			
DISC DIA. (inches)	112	112	112	112	112	112			
DIM. EE (inches)	11.00	11.00	11.00	11.00	11.00	11.00			
MAX. BLADE DIM.	AA	4.56	4.19	3.81	3.51	3.17			
AT 22 DEG. PITCH	BB	3.78	3.48	3.17	2.92	2.58			
MAX. DEFLECTION	CC	10.28	10.42	10.54	10.65	10.79			
	DD	9.10	9.26	9.39	9.51	9.60			
	FF	10.00	11.00	12.00	14.00	14.00			

- FOR HUB INSTALLATION AND OPERATION SEE MANUAL IN 6000H.
- THRUST SPACER RECOMMENDED IF GEAR BOX SHAFT HAS NO SHOULDER.
- THE AA, BB, CC AND DD DIMENSIONS CAN VARY AS MUCH AS 1 1/2 INCHES DEPENDING ON HOW THE BLADES ARE TRACKED.
- A MINIMUM CLEARANCE OF DIMENSION FF UNDER BLADE TIPS IS REQUIRED.

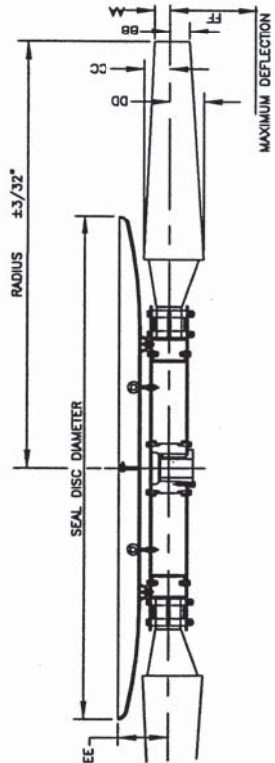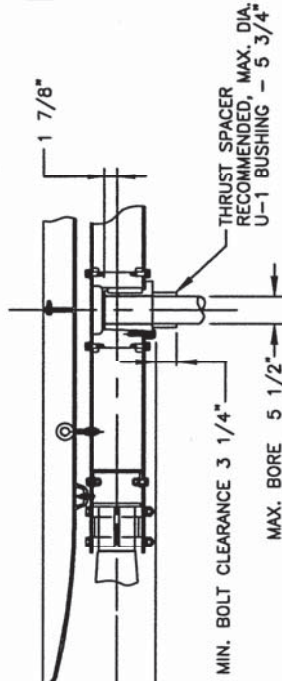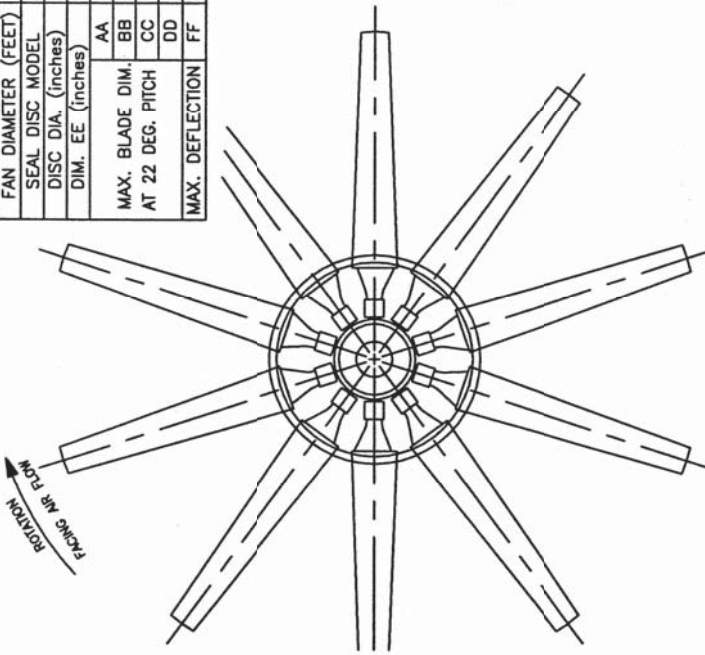

ACFM	STATIC PRESS.	IN. WATER
TEMP.	DENSITY RATIO	ALT.
FAN R.P.M.	PITCH ANGLE (APPROX.)	° TO —
FAN MODEL	HUB MODEL	
BLADE	BORE	KEYWAY
QTY.		
P.O. NO.	HUDSON JOB NO.	DATE
APPROVED		DRAWING NO.
HUDSON PRODUCTS CORPORATION		CP-6000H
HOUSTON, TEXAS		
CERTIFIED PRINT		

5	4	3	2	1	REVISION
CY	CRG	CRG	CRG	CRG	REVISION BY
10/28/05	8/20/05	8/4/05	4/2/05	1/23/05	APPROVED BY
					DATE